


Woven Roving

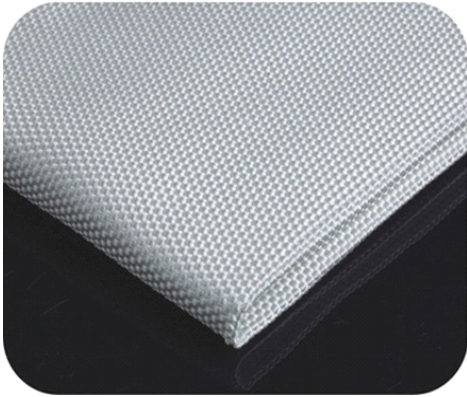

Fibtex™ woven roving is fabricated with rovings so that economically it is more effective as a reinforcement material than other fabrics. It is commonly used with hand lay-up F.R.P. products.

- **Specifications**
- Available in E-Glass and C-Glass
- Weave - Plain
- Thickness - 0.20 ~ 0.80mm (0.0078 ~ 0.0314")
- Density - 40x36 ~ 20x18 ends/10cm (ends/4")
- Warp (tex) - 270 ~ 2000

- Weft (tex) - 270 ~ 2200
- Weight - 200 ~ 800 g/m² (5.88 ~ 23.55 oz/yd²)
- Width - 900 ~ 2390mm (36 ~ 94")
- 20ft container loads about 14 metric tonnes (30,870 lbs)

Technical Characteristics

Product No.	Type of Glass	Weight (g/m ²)	Filament Diameter (µm)	Density (ends x ends/cm)	Moisture Content (%)	Size Content(%)
CWR200	C	200	11	6.0 x 6.0	<0.5	0.60 ± 0.25
CWR300	C	300	11	6.0 x 4.0	<0.5	0.60 ± 0.25
CWR360A	C	360	11	6.0 x 6.0	<0.5	0.60 ± 0.25
CWR360B	C	360	11	4.3 x 4.0	<0.5	0.60 ± 0.25
CWR400	C	400	13	4.0 x 3.8	<0.5	0.60 ± 0.25
CWR600	C	600	13	2.6 x 2.6	<0.5	0.60 ± 0.25
CWR800	C	800	13	2.0 x 2.0	<0.5	0.60 ± 0.25
EWR200A	E	200	11	5.0 x 4.2	<0.3	0.55 ± 0.25
EWR200B	E	200	11	6.0 x 6.0	<0.3	0.55 ± 0.25
EWR400	E	400	11	4.0 x 3.5	<0.3	0.55 ± 0.25
EWR500	E	500	17	3.6 x 3.1	<0.3	0.55 ± 0.25
EWR600	E	600	17	2.6 x 2.5	<0.3	0.55 ± 0.25
EWR800	E	800	24	1.8 x 1.8	<0.3	0.55 ± 0.25

Individual and Bulk Packaging

Product No.	Standard Width (mm)	Weight per Carton (kg)	Cartons per 20ft Container
CWR200 and CWR300	1000	30	450
CWR360 and CWR400	1000	36	450
CWR600	1000	38	450
CWR800	1000	40	450
EWR500	1000 and 1270	40 and 50	16 rolls/pallet and about 13,000 kgs / 20ft container
EWR600	1000 and 1270	40 and 50	
EWR800	1000 and 1270	40 and 50	